

## Funke Chamber DN 800 Price-Inquiry

## Binding Order

Please complete and send to: per post, see address below, per fax: +49 2388 3071-7550, per e-mail: info@funkegruppe.de

Sender / Contact details:	Project / Site Address:	Order placed by:
		Order Date:
		Delivery Date:
		Chamber Number:

Groundwater Level Below Cover Level [m]: \_\_\_\_\_

Invert Level Outflow [m]: \_\_\_\_\_

Ground Level - Channel Bottom

Model:            Type 1            Type 2

Colour:            Brown


Cover:            Class B            Class D

self-leveling

Height [mm]:

**Entrance:**

According to DIN EN 476, chambers that are not accessible may not exceed the maximum installation depth of 3.0 metres! When using a Class D 400 cover, a concrete load distribution ring with an additional construction height of 150 mm is required!

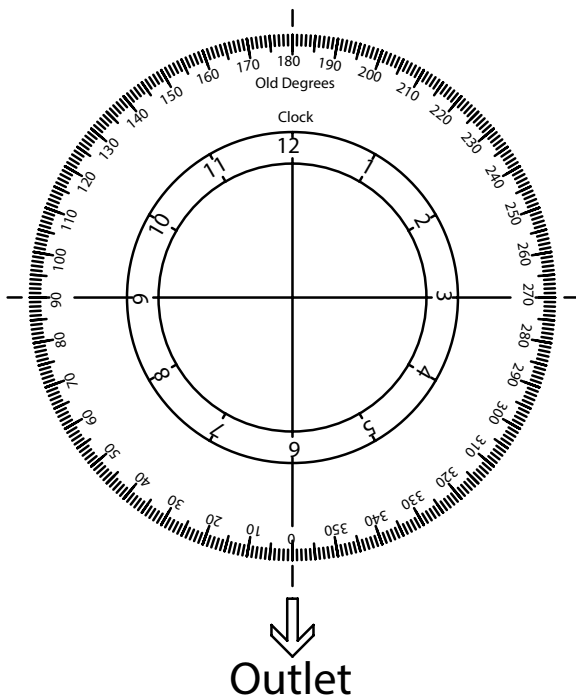

Outlet DN: \_\_\_\_\_

Main Inlet DN: \_\_\_\_\_

Angle: \_\_\_\_\_

Gradient Outlet Pipe:    1% \_\_\_\_\_

Gradient Inlet Pipe:    1% \_\_\_\_\_

2. Inlet DN: \_\_\_\_\_

Angle: \_\_\_\_\_

Gradient 2nd Inlet:    1% \_\_\_\_\_

Comments:

Riser Pipe Length [mm]: _____
Date/Name: _____
<b>to be completed by FUNKE</b>

Company Stamp:
Date / Name / Signature:
<b>to be completed by Customer</b>